


ABC SERIES											
Model Number*	Max Amps	Typical Horsepower Usage								Dimensions	
		208 V		240V		480V		600V		Panel Dim Ref.#	NEMA 4/12 Dim Ref. #
		Std. Duty	Extra Duty	Std. Duty	Extra Duty	Std. Duty	Extra Duty	Std. Duty	Extra Duty		
ABC-10	10	5	5	10	5	15	10	25	10	2	7
ABC-24	24	10	5	15	7.5	20	15	30	20	2	7
ABC-50	50	15	7.5	20	10	40	25	50	30	2	7
ABC-100	100	30	20	40	25	75	50	100	60	2	7
ABC-200	200	75	40	75	50	150	100	200	125	3	8
ABC-300	300	100	60	125	75	250	150	300	200	4	9
ABC-400	400	150	75	150	100	350	200	400	250	4	9
ABC-550	550	250	125	200	150	500	300	600	350	5	10
ABC-800	800	350	200	350	200	700	450	900	500	5	10
ABC-1000	1000	400	250	400	300	900	500	1000	600	5	10

Dim Ref. #	Dimensions (Inches)					
	A	B	C	D	E	F
2	10.5	7.9	7.2	10	6.8	0.21
3	16.5	10	10	15.9	9	0.28
4	16	16	10	15	15	0.5
5	21	26	10.4	20	25	0.5
6	16	12	9	14.5	10.5	0.5
7	20	16	9	18.5	14.5	0.5
8	24	20	16	22.5	18.5	0.5
9	36	24	16	34.5	22.5	0.5
10	36	30	16	34.5	28.5	0.5

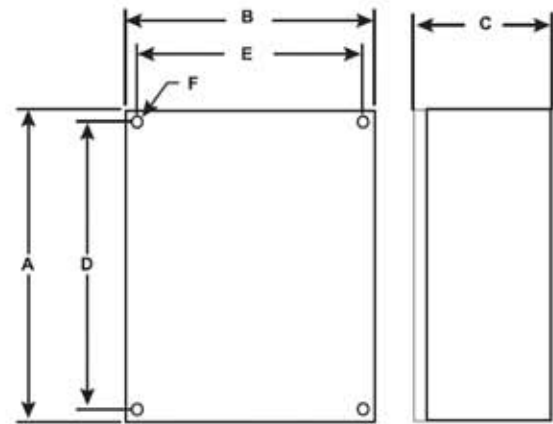

NOTES:

1. Never exceed the Full Load Amp rating of the motor without checking the motor manufacturer's data with regards to appropriateness of the application and duty cycle.
2. If duty cycle is not known, Motortronics recommends using the Extra Duty Brake since braking current can be adjusted down to meet the actual load requirements.



DRIVE CENTRE
 Industrial Automation Systems Integrators

57 Galaxy Blvd., Units 1 & 2, Toronto, ON M9W 5P1
 TEL: (416) 231-6767
www.drivecentre.ca