


OPTIONS / SPECIAL SOLUTIONS


350 - 24,000 Nm

TORSIONALLY STIFF DISC PACK COUPLINGS - FURTHER POSSIBILITIES

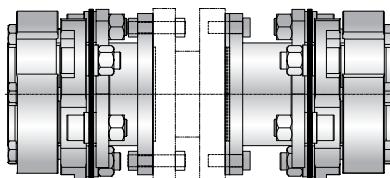


WITH CONICAL CLAMPING RING HUBS AND FLANGE MOUNTING FOR TORQUE TRANSDUCERS

- ▶ high torsional stiffness
- ▶ high clamping pressure
- ▶ backlash free precision torque transmission




WITH FULLY SPLIT CLAMPING HUBS

- ▶ simple lateral installation and removal
- ▶ backlash free precision torque transmission
- ▶ single or double flex



WITH SINGLE SPLIT CLAMPING HUBS

- ▶ easy to mount
- ▶ backlash free precision torque transmission
- ▶ optional keyway
- ▶ single or double flex



WITH ELECTRICAL ISOLATION

- ▶ with keyed connection, conical clamping ring hub, clamping hub, or flange connection
- ▶ single flex, double flex, or rigid