

**MK1**

# WITH RADIAL SET SCREWS

0.05 - 10 Nm



## ABOUT

### FEATURES

- ▶ integral dismantling groove eliminates the need for flats on shafts
- ▶ economical design
- ▶ larger bore diameters in a small size possible

▶ **Hubs:** aluminium

### DESIGN



Two hubs with radial set screws concentrically mounted to flexible bellows. Speeds up to 20,000 rpm; over 20,000 with finely balanced version.

### MATERIAL

- ▶ **Bellows:** size 0.5 tombac; sizes 1 and up high grade stainless steel

### Advantage:

Bore diameters above 4mm have an integral dismantling groove, which provides clearance over any burr which may be kicked up by the set screw, eliminating the need for flats on shafts.

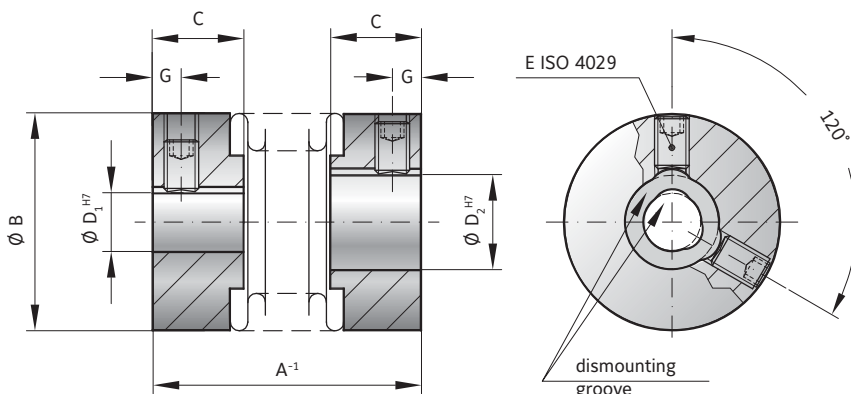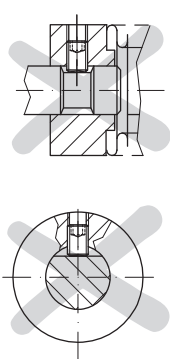

## MODEL MK1

SIZE			0.5	1	5	10	15	20	45	100
Rated torque	(Nm)	$T_{KN}$	0.05	0.1	0.5	1.0	1.5	2.0	4.5	10
Overall length	(mm)	$A^{-1}$	14	20	20 23 26	22 25 28	24 29	26 31 35	37 45	43 53
Outside diameter	(mm)	B	6.5	10	15	15	19	25	32	40
Fit length	(mm)	C	4	5	6.5	6.5	7.5	11	13	15
Inside diameter possible from $\emptyset$ to $\emptyset$ H7	(mm)	$D_{1/2}$	1-3	1-5	3-9	3-9	3-12	3-16	6-22	6-28
Clamping screw ISO 4029		E	1xM2	1xM2.5	1xM3	1xM3	2xM3	2xM4	2xM5	2xM6
Tightening torque of the fastening screw	(Nm)	E	0.35	0.75	1.3	1.3	1.3	2.5	4	6
Distance	(mm)	G	1.5	1.8	2	2	2	2.5	3.5	4
Moment of inertia	(gcm <sup>2</sup> )	$J_{ges}$	0.1	0.4	1.1 1.2 1.3	1.3 1.8 2	4.7 5.5 15	18 20 65	70 180 220	
Approximate weight	(g)		1	5	6 6 6	6 7 8	12 14 22	24 26 54	58 106 114	
Torsional stiffness	(Nm/rad)	$C_T$	50	70	280 210 170	510 380 320	750 700 1200	1300 1200 7000	5000 9050 8800	
Axial	(mm)	Max. values	0.4	0.4	0.4 0.5 0.6	0.4 0.5 0.6	0.5 0.7 0.5	0.6 0.7 0.7	1 1 1.2	
Lateral	(mm)		0.1	0.15	0.15 0.2 0.25 0.15	0.2 0.25 0.15	0.15 0.2 0.15	0.2 0.25 0.2	0.2 0.25 0.2	0.3
Angular	(degree)		1	1	1 1.5 2 1	1.5 2 1	1.5 2 1.5	1.5 1.5 1.5	2 1.5 2 1.5	2

ORDERING EXAMPLE	MK1	5	26	4.76	5	XX
Model	●					Special designation only (e.g. high speed balancing).
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	

For custom features place an XX at the end of the part number and describe the special requirements (e.g. MK1 / 5 / 26 / 4.76 / 5 / XX; XX=finely balanced for 25,000 rpm)